


1. ELECTRICAL CHARACTERISTICS
 - 1-1. CONTACT RESISTANCE:
60 Milliohms Max
 - 1-2. INSULATION RESISTANCE:
1,000 Megohms Min.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE:
250V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. OPERATION TEMPERATURE RANGE:
-25°C~+70°C
 - 2-2. DURABILITY: 3000 CYCLES
3. MATERIAL:
 - 3-1. HOUSING: THERMOPLASTIC,UL 94-V0
 - 3-2. TERMINAL: PHOSPHOR BRONZE
 - 3-3. SHELL: STAINLESS STEEL
4. FINISHED:
 - 4-1. TERMINAL: Ni PLATED UNDER,Au PLATED ON
CO TACT AREA F PLATED O SOLDER TAIL

T-CARD P/N	PIN NAME	NANO SIM P/N	PIN NAME
T1	DAT2	P1 A/B	VCC
T2	CD/DAT3	P2 A/B	RST
T3	CMD	P3 A/B	CLK
T4	VDD	P5 A/B	GND
T5	CLK	P6 A/B	VPP
T6	VSS	P7 A/B	I/O
T7	DATO		
T8	DAT1		

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X: ±Z X' ±0.5	PART NAME 品名 DUAL NANO SIM+T-FLASH Card Connector 20Pin SMT Type H=2.5mm Gold Flash Plating Black Color Reel Packing ROHS
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C0659-20DGBR00R
DATE 制表日 2018/01/25	PAGE 張數 1 OF 3	REV. 版次 A	

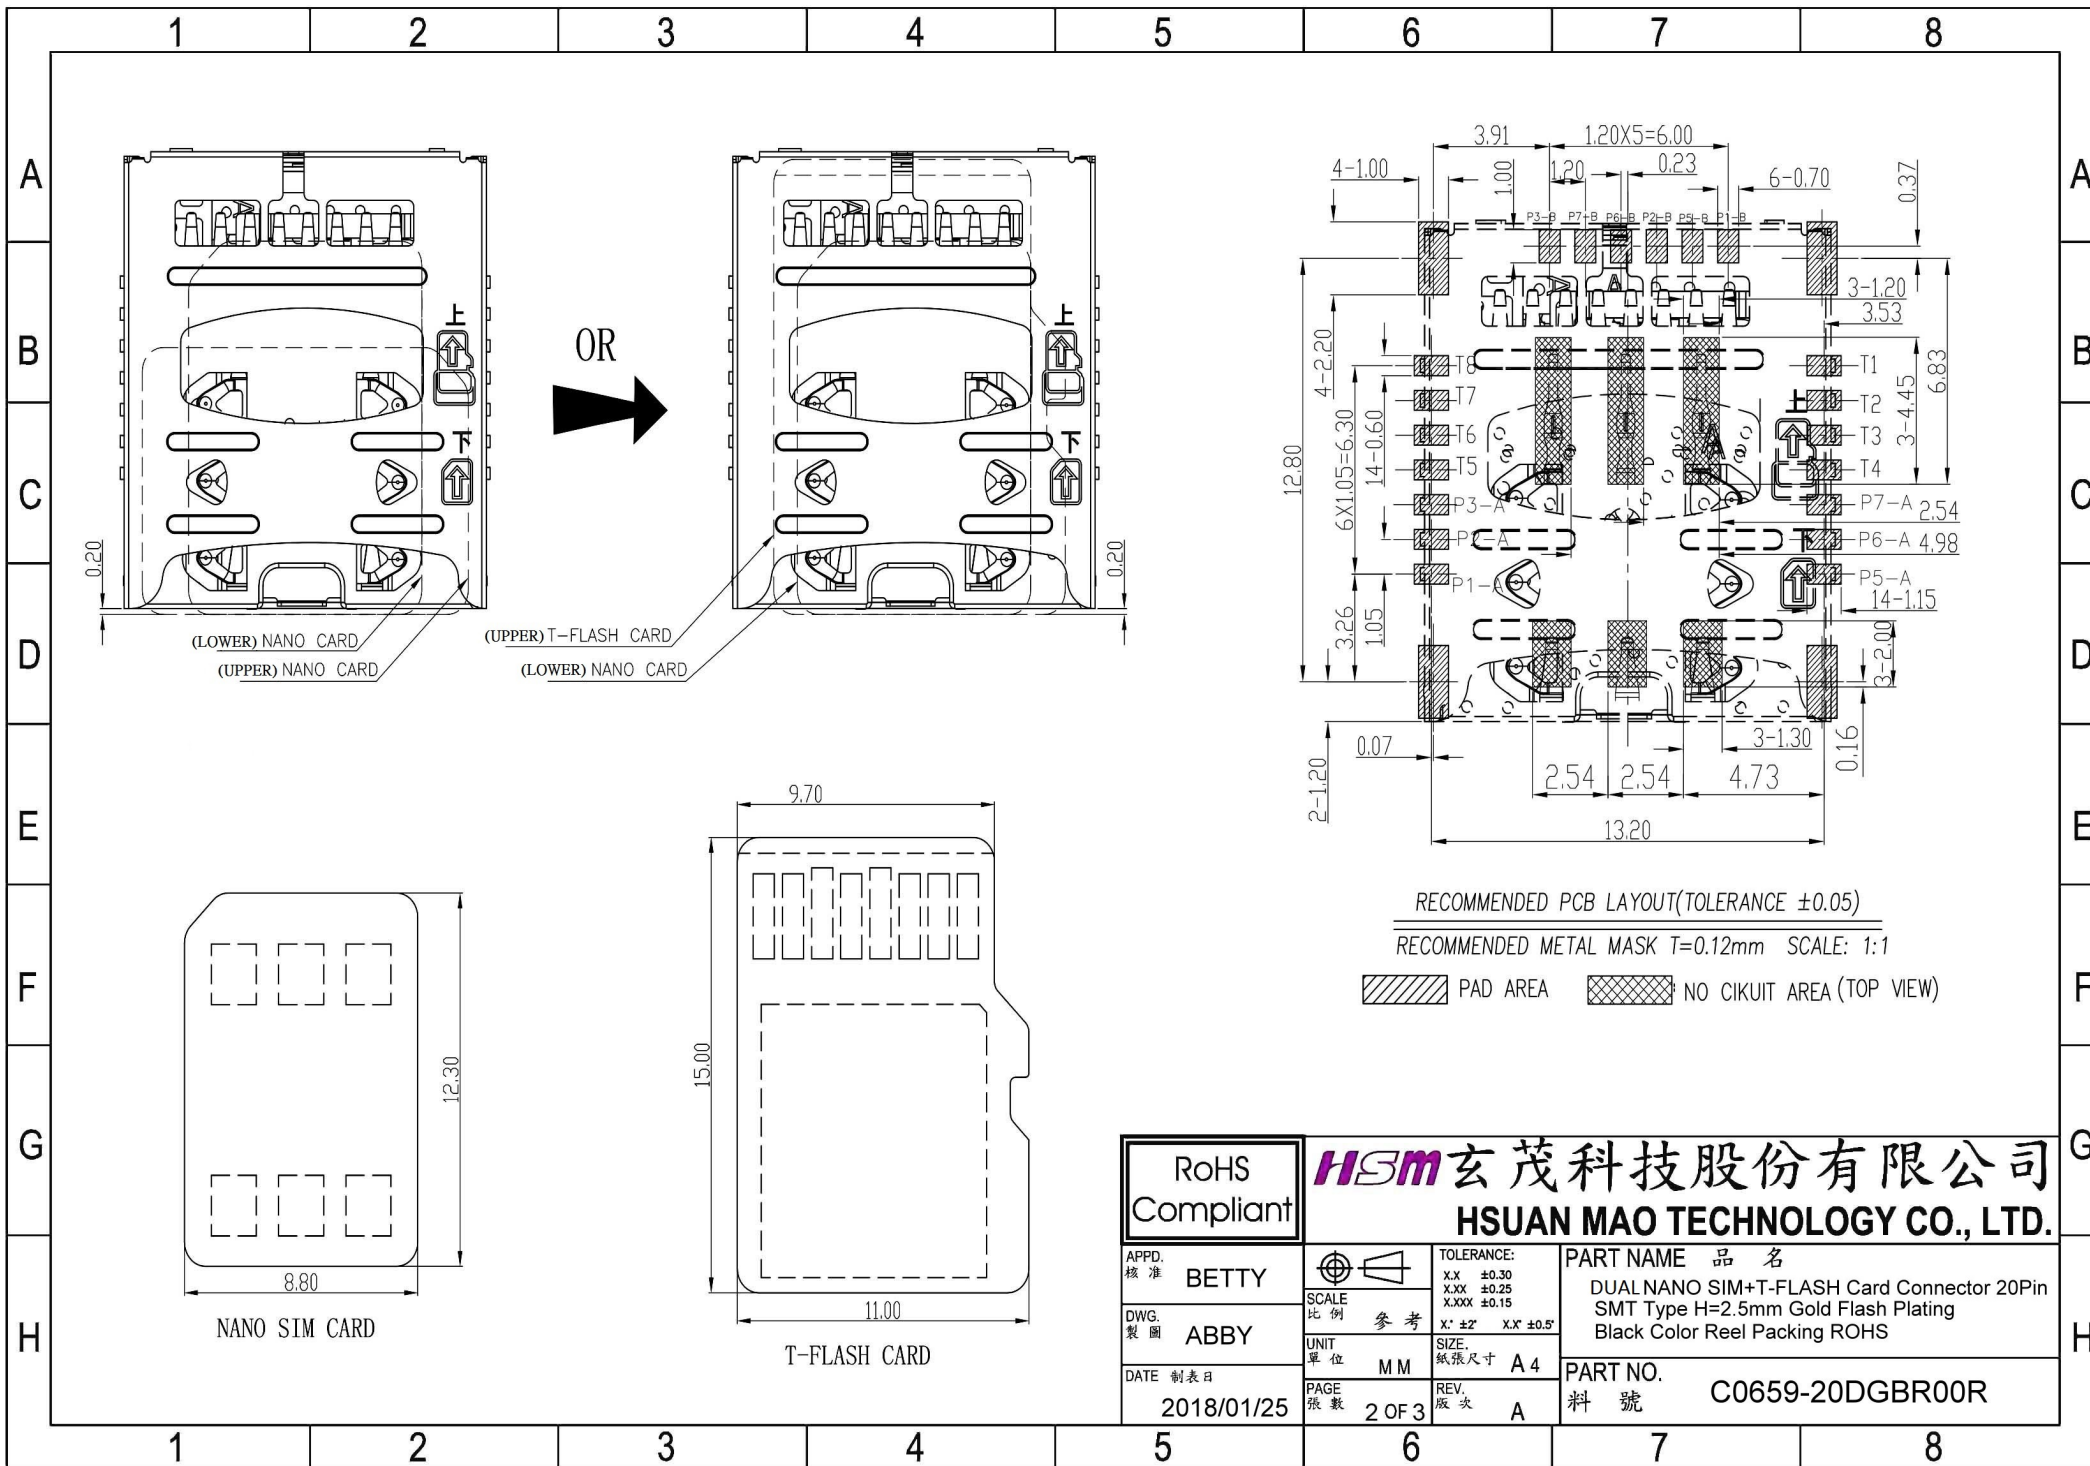


RECOMMENDED PCB LAYOUT(TOLERANCE ± 0.05)

RECOMMENDED METAL MASK T=0.12mm SCALE: 1:1

PAD AREA
 NO CIKUIT AREA (TOP VIEW)

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY		TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X: $\pm 2^{\circ}$ X.X $\pm 0.5^{\circ}$
DWG. 製圖	ABBY	SCALE 比例	PART NAME 品名 DUAL NANO SIM+T-FLASH Card Connector 20Pin SMT Type H=2.5mm Gold Flash Plating Black Color Reel Packing ROHS
DATE 制表日	2018/01/25	UNIT 單位	PART NO. 料號 C0659-20DGBR00R
		PAGE 張數	
		2 OF 3	
		MM	
		REV. 版次	
		A	

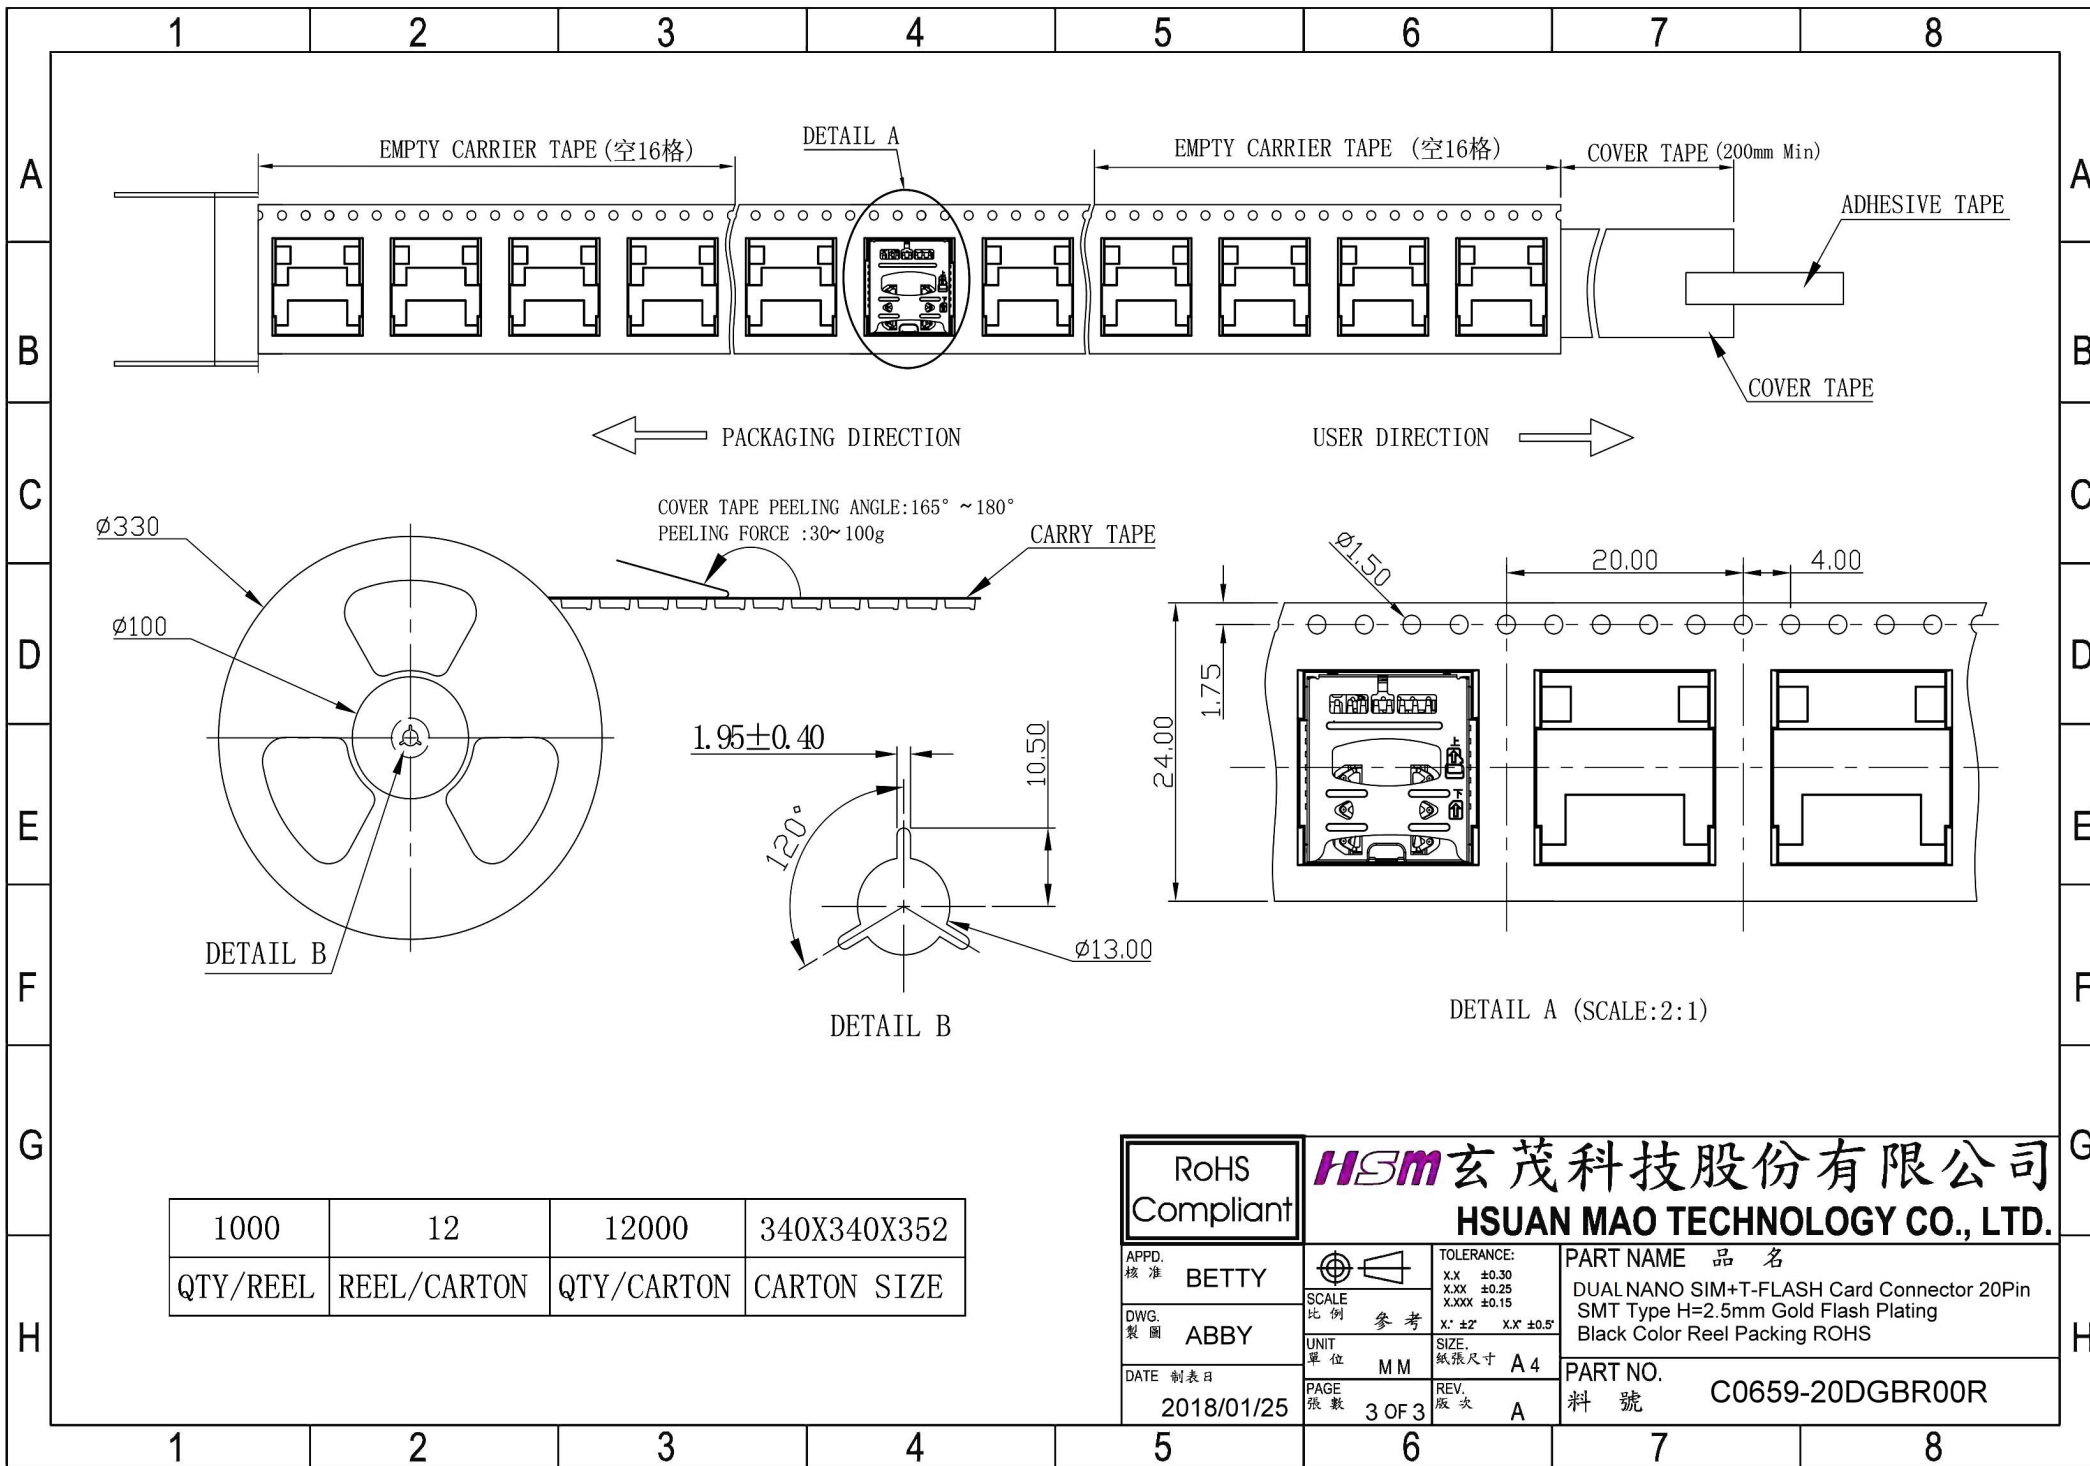

1000	12	12000	340X340X352
QTY/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X: ±Z X' ±0.5'	PART NAME 品名 DUAL NANO SIM+T-FLASH Card Connector 20Pin SMT Type H=2.5mm Gold Flash Plating Black Color Reel Packing ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 C0659-20DGBR00R
DATE 制表日 2018/01/25	PAGE 張數 3 OF 3	REV. 版次 A	